

**Only skilled electricians may install this electrical equipment otherwise there is the risk of fire or electric shock!**

Temperature at mounting location:  
-20°C up to +50°C.

Storage temperature: -25°C up to +70°C.

Relative humidity:  
annual average value <75%.

DALI-2 gateway, bidirectional. Only 1 watt standby loss.

Modular device for DIN-EN 60715 TH35 rail mounting. 2 modules = 36 mm wide, 58 mm deep.

**Connection to the Eltako-RS485 bus. Bus cross wiring and power supply with jumper. Operation in conjunction with FAM14.**

Supply voltage 230 V/50 Hz at terminals N and L.

The IEC 62386-compliant voltage for DALI devices is provided at the DA +/- terminals.

Output current 200 mA/max. 250 mA.

Switch-on ramp-up time max. 250 ms.

In the event of a short circuit, the power supply switches off the supply voltage. A mechanism for cyclic switch-on attempts is available.

**Groups 0-15** can be controlled and the **broadcast command** can be sent. In addition **DALI scenes 0-15** can be controlled.

The FD2G14 internally stores the dimming value for each of the groups 0-15 and provides this value as feedback according to EEP A5-38-08 Command 2.

The DALI components can be configured with the configuration software DALI-Cockpit or DALI-Monitor and the DALI interfaces DL-USB mini or DL-Flash-USB.

The FD2G14 internally saves the dimming value for each of the groups 0-15 and supplies this value as feedback.

The FD2G14 occupies 16 BR14 device addresses. The feedbacks of the device

addresses correspond to the dimming values of the DALI groups 0-15 in ascending order.

Feedback signals can be converted by PCT14 for each single group from a dimming value telegram (%) to pushbutton telegram (ON/OFF). BR14 actuators can then be activated by the feedback signals:

RPS telegram, 0x70 = dimmer on, 0x50 = dimmer off.

The FD2G14 fulfils the function of the DALI master and the DALI power supply.

The rotary switches can only teach in pushbuttons for groups 0-8 and DALI scenes 0-9. Activation telegrams for groups 9-15 and scenes 10-15 are only possible by entries in PCT14.

The evaluation of DALI-2 sensors can be configured and activated using PCT14.

DALI-2 event messages can be interpreted and output on the RS485 BUS using the hold terminal. This makes it possible to output data to the Enocean radio network using FTD14.


**Important: Wireless pushbuttons always need to be double-clicked when they are taught-in manually in the FD2G14. CLR only needs a single click.**

A direction pushbutton or universal pushbutton with identical ID and identical pushbutton can be taught in several times in different groups. The group last selected is always valid. Therefore, a pushbutton can either switch only one group or broadcast to all groups.

One FBH per group can also be taught in. With a manual teach-in this always acts dependent on brightness. With PCT14 you can also set the brightness threshold.

The delay time for switch-off after no motion is detected can be set together in minutes (1...60) for the FBH devices of all groups. The default is 3 minutes.

## Function rotary switches

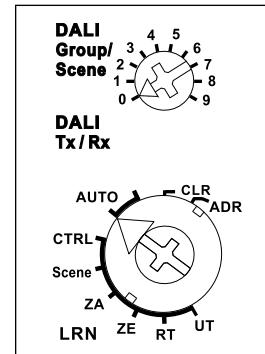

**Operation:** After switching on the power supply, the complete DALI bus is scanned after the RS485 bus scan of the FAM14. The green LED of the FD2G14 then flickers for several seconds. All DALI devices present will be recognized with their short address and following adjustments will be read: MIN Level, Dimmspeed (fade rate & fade time) and group affiliation. The least possible minimum brightness is determined from this data and the dimming speed for groups 0...15. All DALI devices in a group must have the same dimming speed, so each group can be dimmed at an individual speed. The allowable range for the FADE RATE is 16 to 179 steps per second.

The FADE TIME must be set to a value higher than 0.7s. The DALI scan must be performed each time a change of the settings has been made. For this, the lower rotary switch of the FD2G14 must be set to AUTO again.

**Universal pushbutton:** Switch on and off or dim up and down, the direction change is made by a short release of the pushbutton.

**Direction pushbutton:** 'Switch on and dim up' on one side and 'Switch off and dim down' on the other side.

A double-click on the switch-on side activates automatic dim-up to full brightness at dim speed.

**ZE:** Switches on at maximum brightness (100%). A dimming value in % can be defined with PCT14.

**ZA:** Switches off. 'Soft OFF' can be deactivated with PCT14.

**White tone and intensity double rocker switch (selectable with PCT14)**

The left-hand rocker changes the colour

temperature. Press top for cool white and bottom for warm white. The right-hand rocker changes the intensity: top for brighter, bottom for darker.

**FBH:** A wireless motion detector and brightness sensor FBH can be taught-in. It is only evaluated as a motion detector. A brightness threshold at which the lighting is switched on dependent on the brightness (in addition to motion) can be defined with PCT14. If no motion is detected, switch-off takes place after 3 minutes. The switch-off delay can be set between 1 and 60 minutes. Via PCT14, it's possible to set a time which the FBH is blocked for a selected time after a manual switching action via pushbutton. With a short press on the on side of a direction pushbutton, the FBH will be activated again.

FBHs of the same DALI group are linked if they are assigned to a line smaller than 32 in the ID assignment area.

**Constant light control with brightness sensor according to EEP A5-06-02 (manufacturer Eltako):**

The automatic brightness control switches on automatically once the brightness sensor is taught in. The required brightness is set using a pushbutton and the first brightness value then received from the brightness sensor becomes the target brightness. This is kept constant automatically by the brightness sensor by incoming brightness values from the brightness sensor. After every change in brightness (dimming) by the pushbutton, the brightness value then received from the brightness sensor becomes the new target brightness. If the target brightness is set by the PCT14 or saved with a 'direction pushbutton for target brightness', it then becomes permanent. A change in brightness by pushbutton is then overridden by the permanently set target brightness. If an FBH is also taught in, the light is switched on in case of motion detection and undershot target brightness and switched off in case of no motion detection or exceeded target brightness. Switching off by pushbutton deactivates automatic control by FBH or brightness sensor. Central pushbutton, scene pushbutton and dimming values by controller also result in deactivation. Automatic control is reactivated by briefly pressing the pushbutton on the switch-on side of the direction pushbutton.

**Save target brightness:** Press top of direction pushbutton for target brightness.

The current brightness sent by the brightness sensor is saved.

**Clear target brightness:** Press bottom of direction pushbutton for target brightness.

**FTK:** When the window is opened, the light switches on. When the window is closed, the light switches off.


**Controller:** With a dimming value telegram for one group, the blocking bit only acts on the group pushbutton for this group. With Broadcast, you can still change the group. With a dimming value telegram for all groups (Broadcast), the blocking bit only acts on the Broadcast pushbutton. You can still change the groups using group pushbuttons.

**The yellow LED** lights up permanently when the power supply is applied.

**The red LED** lights up when a wireless signal is received.

**The green LED** lights up when data is sent to DALI operating units or is received from DALI operating units.

## Typical connection

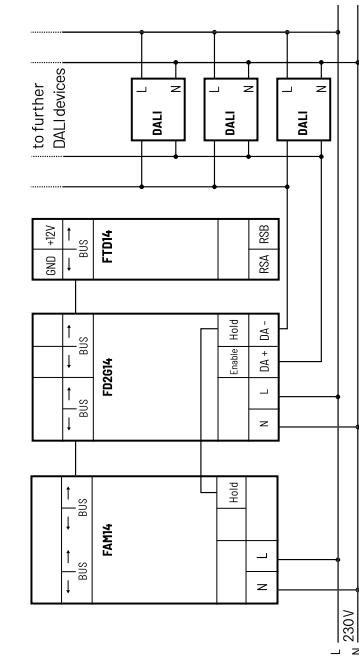

**Teaching-in wireless sensors in wireless actuators**

**All sensors must be taught-in in the**

**actuators so that they can detect and execute commands.**

#### **Teaching-in FD2G14**

The teach-in memory is clear on delivery from the factory. To ensure that a device was not previously taught-in, **clear the complete memory:**  
Turn the lower rotary switch to CLR. The red LED flashes at a high rate. Within 10 seconds, turn the upper rotary switch three times to right stop (turn clockwise) and back again. The LED stops flashing and goes out after 2 seconds. All taught-in sensors are cleared.

**Clear single taught-in sensors** in the same way as in the teach-in procedure, except that you set the lower rotary switch to CLR. The LED previously flashing at a high rate goes out.

#### **Teaching-in sensors:**

1. Set the upper rotary switch to the required group:  
0..8 = Group 0..8

9 = Broadcast

2. Set the lower rotary switch to the required teach-in function. The red LED flickers at a low rate.

**UT** = Teach in universal pushbutton

**RT** = Teach in direction pushbutton, direction pushbuttons are automatically taught-in fully when pressed.

Depending on where the button is pressed, the functions for switch-on and dim-up are defined on one side and switch-off and dim-down on the other side.

**ZE** = teach in 'central on'

**ZA** = teach in 'central off'

**Scene** = pushbutton for DALI scene recall (with the upper rotary switch, the required DALI Scene 0..9 is selected); teach in FBH, FHD65SB and FTK

**CTRL** = Controller and rotary switch. During the teach-in process, the actuator automatically sends a confirmation telegram if it has a device address and the upper rotary switch on FAM14 is turned to Pos. 2. Teach in 4-way light scene pushbutton (only on the FD2G14-Broadcast white tone and intensity double rocker switch). A complete switch with

double rocker is automatically assigned.

3. Quickly confirm the pushbutton to be taught-in by pressing it 2x in a row ('double-click'). The LED goes out.

A pushbutton (rocker end) can not be taught in several groups.

To teach-in further sensors, turn the lower rotary switch briefly away from its position. Continue the procedure from pos 1. After teach-in, the lower rotary switch is set to AUTO.

#### **Saving light scenes**

Up to four brightness values can be saved using a 4-way light scene pushbutton.

1. Set the required brightness value using a previously taught-in pushbutton or the Controller.
2. Within 60 seconds, press one of the four rocker ends of the previously taught-in light scene pushbutton for longer than 3 seconds but less than 5 seconds to save the brightness value.
3. To save other light scenes, repeat from point 1.

#### **Retrieving light scenes**

Up to four brightness values are retrievable using a 4-way light scene pushbutton:  
pushbutton with double rocker;  
top left = light scene 1 (ex factory 30%), top right = light scene 2 (60%),  
bottom left = light scene 3 (100%) and bottom right = light scene 4 (0%).

With PCT14, the brightness value of the 4 light scenes for groups 0-15 can be changed. If MASK is chosen for a scene, then this group stays unchanged at scene's call.

#### **Issue device address for the FD2G14:**

Turn the rotary switch on the FD2G14 to Pos. 1. The bottom LED lights up red.

**FD2G14 with 16 groups:** The upper rotary switch on the FD2G14 must be turned to Pos. 0.

**FD2G14-Broadcast:** The upper rotary switch on the FD2G14 must be turned to Pos. 9.

Turn the lower rotary switch on the FD2G14 to ADR. The red LED flashes at a slow rate. After the FAM14 issues the address, the lower LED of the FAM14 lights up green for 5 seconds

and the LED on the FD2G14 goes out.

**FD2G14 with 16 groups:** When the address is issued by the FAM14, 2 virtual FD2G14 are created each with 8 consecutive device addresses. Make sure that there is an address gap of at least 16 consecutive addresses before issuing addresses in the bus. Address gaps between 9 and 15 cause address conflicts. The best solution for issuing new addresses is therefore to start with the FD2G14. This condition does not exist when the PCT14 is used to issue addresses since the device with 16 device addresses is detected and displayed.

**FD2G14-Broadcast:** Only 1 device address is generated when addresses are issued. In the FD2G14 broadcast the CW-WW dimmer must have address 0.

#### **Clear device configuration:**

Set the lower rotary switch to CLR. The LED flashes at a high rate. Within the next 10 seconds, turn the upper rotary switch three times to left stop (turn anticlockwise) and away again.

The LED stops flashing and goes out after 5 seconds. The factory settings are restored.

#### **Clear device configuration and device address:**

Set the lower rotary switch to CLR.

The LED flashes at a high rate. Within the next 10 seconds, turn the upper rotary switch six times to left stop (turn anticlockwise) and away again.

The LED stops flashing and goes out after 5 seconds. The factory settings are restored and the device address is cleared.

#### **Configure FD2G14:**

The following points can be configured using the PC PCT14 tool (ab Version 8.1):

- Parameters for FBH
- Parameters for FIH65B or brightness sensor
- Light scenes in %
- Dimming value in % for one pushbutton
- Dimming value in % for Central 'ON' (DIRECT ARC POWER)
- Central 'ON' without 'soft ON' (RECAL MAX LEVEL)
- Central 'OFF' without 'soft OFF' (OFF)
- White tone and intensity double rocker switch (DT8 Tuneable White)
- Issue or clear device address

**Caution: Do not forget the 'Disconnect link to FAM' in the PC Tool. No wireless commands are executed while there is a link between the PC Tool and the FAM14.**

#### **DALI-System**

In the system the DALI Gateway acts as a central control component (master controller), which also ensures the power supply of the DALI interface. The DALI devices, eg. DALI ballasts, operate as command receiver (slave), which only return states or status messages to the master upon request. It is solely the task of the DALI Gateway to send commands received via wireless control to the DALI line and to control the devices. The use of other DALI control components in multi-master mode, eg an additional DALI center, a DALI potentiometer or mains voltage pushbuttons, are unnecessary and may lead to malfunctions in the DALI system in some cases. For this reason it is necessary to remove other components of the system - especially when retrofitting existing DALI installations.

The connection of DALI-2 sensors is possible. In this context, DALI-2 event messages can be evaluated.

Additional power supplies can not be connected.

#### **Overview of EnOcean telegrams**

The following EnOcean telegrams can be received and processed:

- RPS wireless pushbutton telegrams
- Telegrams according to
- EEP D5-00-01 (Window-door contact)
- EEP F6-10-00 (Window-door contact, window handle)
- EEP A5-38-08 Command 2 (Controller)
- EEP A5-07-01 (Motion)
- EEP A5-08-01 (Motion, brightness)
- EEP A5-06-02 (Brightness sensor manufacturer ELTAKO)

The conversion of DALI-2 event messages can be configured using PCT14. Output into the EnOcean radio network is possible in accordance with the following EEPs:

- EEP A5-02-05 (Temperature)
- EEP A5-04-02 (Temperature and humidity)
- EEP A5-04-03 (Temperature and humidity)
- EEP A5-05-01 (Air pressure)

- EEP A5-06-01 (Brightness)
- EEP A5-06-02 (Brightness)
- EEP A5-06-03 (Brightness)
- EEP A5-08-01 (Brightness, temperature, motion)
- EEP A5-09-04 (Humidity, CO<sub>2</sub>, temperature)
- EEP A5-09-05 (Air quality sensor/index)
- EEP F6-02-01 (Wireless pushbutton)


Confirmation telegrams can be provided as follows:

- EEP A5-38-08 Command 2 or
- RPS telegram, 0x70 - dimmer ON, 0x50 - dimmer OFF

#### **Manuals and documents in further languages:**



<https://eltako.com/redirect/FD2G14>

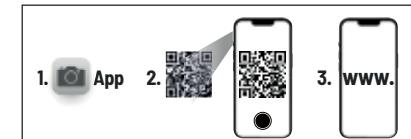

#### **Must be kept for later use!**

We recommend the housing for operating instructions GBA14.

#### **ELTAKO GmbH**

D-70736 Fellbach

#### **Technical Support English:**

☎ +49 711 943 500 25

✉ [technical-support@eltako.de](mailto:technical-support@eltako.de)  
eltako.com