




|                                 |
|---------------------------------|
| OV                              |
| Antall poler: 3                 |
| Antall moduler: 3               |
| Merkestrøm: 63A                 |
|                                 |
| Merkespenning: 230/400V-240/415 |
| Elnr: 1606492                   |

|                                       |                                               |                                       |                                               |
|---------------------------------------|-----------------------------------------------|---------------------------------------|-----------------------------------------------|
| Standard;                             | EN 60898, EN 60947-2                          | Frekvens (Hz)                         | 50/60 Hz                                      |
| Bryte kapasitet EN 60898 230V (Icn)   | 10000A                                        | Bryte kapasitet EN 60898 400V (Icn)   | 10000A                                        |
| Bryte kapasitet EN 60898 230V (Ics)   | 0,75 x Icn                                    | Bryte kapasitet EN 60947-2 230V (Icu) | 15 kA                                         |
| Bryte kapasitet EN 60947-2 400V (Icu) | 15kA                                          | Bryte kapasitet EN 60947-2 (Ics)      | 50% Icu                                       |
| Isolasjonsspenning                    | 500 V                                         | Nominell impulsstøtspenning           | 4 kV                                          |
| Minimum drift spenning                | 12VAC/DC                                      | Maks driftsspenning                   | 440VAC/220VDC                                 |
| Antall inn/utkoblinger elektrisk      | 10 000                                        | Antall inn/utkoblinger mekanisk       | 20 000                                        |
| Tverrsnitt enleder kabel              | <=1x35 - <=2x16 - <=1x25+2x10 mm <sup>2</sup> | Tverrsnitt fleksibel kabel            | <=1x35 - <=2x16 - <=1x25+2x10 mm <sup>2</sup> |
| Tiltrekningsmoment                    | 2Nm                                           | Driftstemperatur                      | -25 til +60° C                                |
| Lagringstemperatur                    | -40 til + 70° C                               |                                       |                                               |

## Dimensjon

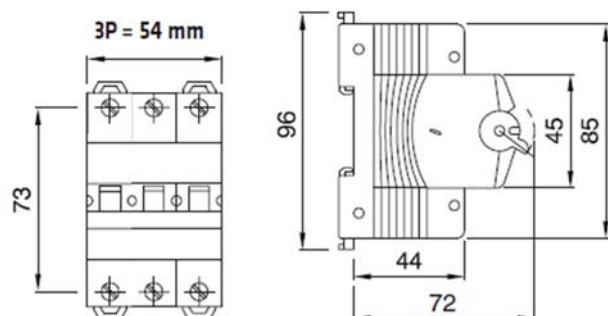

### Selektivitet OV/Jordfeilautomater

|                                   | Upstream | OV Range<br>Type ref. ASXXXXX |      |      |      |        |
|-----------------------------------|----------|-------------------------------|------|------|------|--------|
| Downstream                        | In[A]    | 25                            | 32   | 40   | 50   | 63     |
| MDC100 Range<br>Type ref. GW95XXX | 6        | 1 kA                          | 1 kA | 1 kA | 1 kA | 1,5 kA |
|                                   | 10       | 1 kA                          | 1 kA | 1 kA | 1 kA | 1,5 kA |
|                                   | 16       | 1 kA                          | 1 kA | 1 kA | 1 kA | 1,5 kA |
|                                   | 20       |                               | 1 kA | 1 kA | 1 kA | 1,5 kA |
|                                   | 25       |                               |      |      | 1 kA | 1,5 kA |
|                                   | 32       |                               |      |      |      | 1,5 kA |

## Standarder/godkjenninger

