




OV
Antall poler: 2
Antall moduler: 2
Merkestrøm: 32A
Merkespenning: 230/400V-240/415
Elnr: 1606484

Standard;	EN 60898, EN 60947-2	Frekvens (Hz)	50/60 Hz
Bryte kapasitet EN 60898 230V (Icn)	10000A	Bryte kapasitet EN 60898 400V (Icn)	10000A
Bryte kapasitet EN 60898 230V (Ics)	0,75 x Icn	Bryte kapasitet EN 60947-2 230V (Icu)	30 kA
Bryte kapasitet EN 60947-2 400V (Icu)	20kA	Bryte kapasitet EN 60947-2 (Ics)	50% Icu
Isolasjonsspenning	500 V	Nominell impulsstøtspenning	4 kV
Minimum drift spenning	12VAC/DC	Maks driftsspenning	440VAC/220VDC
Antall inn/utkoblinger elektrisk	10 000	Antall inn/utkoblinger mekanisk	20 000
Tverrsnitt enleder kabel	<=1x35 - <=2x16 - <=1x25+2x10 mm ²	Tverrsnitt fleksibel kabel	<=1x35 - <=2x16 - <=1x25+2x10 mm ²
Tiltrekningsmoment	2Nm	Driftstemperatur	-25 til +60° C
Lagringstemperatur	-40 til + 70° C		

Dimensjon

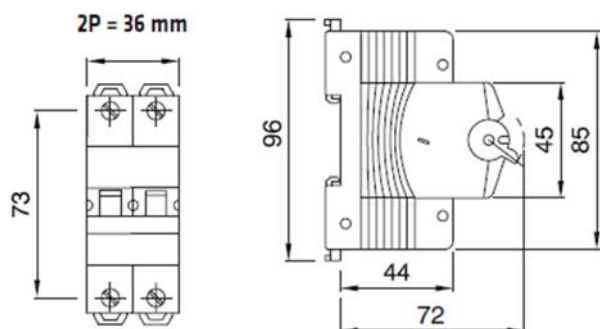

Selektivitet OV/Jordfeilautomater

	Upstream	OV Range Type ref. ASXXXXX				
Downstream	In[A]	25	32	40	50	63
MDC100 Range Type ref. GW95XXX	6	1 kA	1 kA	1 kA	1 kA	1,5 kA
	10	1 kA	1 kA	1 kA	1 kA	1,5 kA
	16	1 kA	1 kA	1 kA	1 kA	1,5 kA
	20		1 kA	1 kA	1 kA	1,5 kA
	25				1 kA	1,5 kA
	32					1,5 kA

Standarder/godkjenninger

