



Industrial-type socket-outlets conforming to IEC 309 Standard, with mechanical interlock consisting of a circuit breaker enabling the plug to be connected and disconnected only in the open position, and the switch to close only with the plug inserted. Wide range including models with rotary switch and fuseholder base, AUTOMATIKA with 6kA C characteristic miniature circuit breaker, and version with safety transformer. High application versatility thanks to the possibility of assembly in back-mounting and flush-mounting boxes, and boards of the 68 Q-DIN and Q-MC ranges.

Type of fuse

Ø 22x58 mm

Type

Vertical

Fuse breaking capacity

> 50 kA

125 °C

Rated insulation voltage (Ui)

500 V

IP67

No. of poles

3P+N+E

IK08

Frequency

50/60 Hz

-25 +40 °C

Protection

Fuse-holder base (CBF)

No

Electrocod

2222

850 °C

Colour

Red

10 kA

Weight

Max. 2.2 Kg

48 A

Rated impulse withstand voltage (Uiimp)

4 kV

63

Reference h




6

380 - 415 V


BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Not resistant	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Not resistant	Not resistant	Limited resistance	Limited resistance	Resistant

DIMENSIONAL

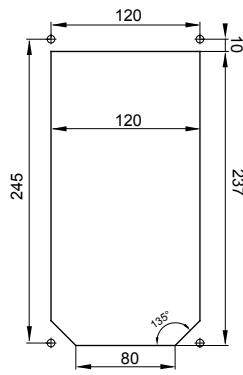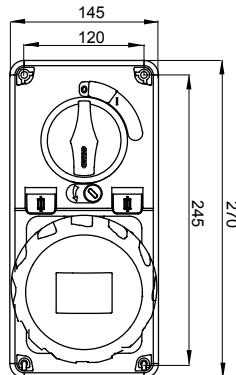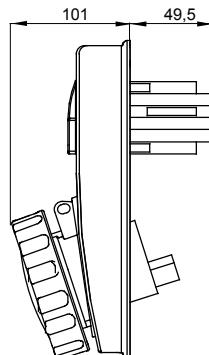


TECHNICAL SYMOLOGY



IP

IK



GWT

850 °C

STANDARDS/APPROVALS

