




Modulær bryter
Antall poler: 2
Antall moduler: 1
Merkestrøm: 16A
Merkespenning: 250 - 415AC
Elnr: 1426571

Standard;	EN 60669-2-4	Frekvens (Hz)	50/60Hz
Bryte kapasitet (Icn)	1500A	Isolasjonsspenning	500V
Merkestrøm	16A	Effekt tap pr pol	0,35W
Slutte kapasitet	$1.25 I_e - 1.1 U_e - \cos\phi = 0.6$	Driftstemperatur	-5 til + 40° C
Tverrsnitt en leder kabel	10mm ²	Tverrsnitt fleksibel kabel	6mm ²
Tiltrekningsmoment	0,8Nm		

Dimensjon

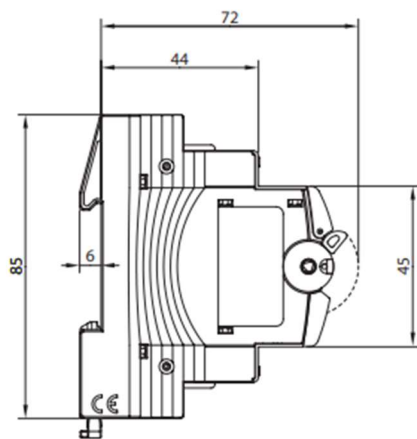

Standarder/godkjenninger

