




Modulær bryter
Antall poler: 2
Antall moduler: 1
Merkestrøm: 32A
Merkespenning: 250-415AC
Elnr: 1426573

Standard;	EN 60669-2-4	Frekvens (Hz)	50/60Hz
Bryte kapasitet (Icn)	1500A	Isolasjonsspenning	500V
Merkestrøm	32A	Effekt tap pr pol	0,35W
Slutte kapasitet	$1.25 I_e - 1.1 U_e - \cos\phi = 0.6$	Driftstemperatur	- 5 til + 40° C
Tverrsnitt en leder kabel	10mm ²	Tverrsnitt fleksibel kabel	6mm ²
Tiltrekningsmoment	0,8Nm		

Dimensjon

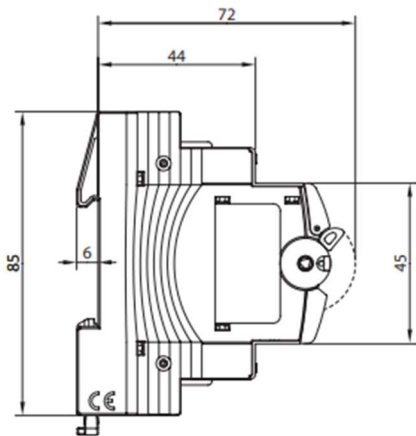

Standarder/godkjenninger



GEWISS S.p.A. Via A. Volta, 1 24069 Cenate Sotto - Bergamo - Italy tel. +39 035 94 61 11 fax +39 035 94 69 09	Malthe Winje Automasjon AS Haukeliveien 48, 1415 Oppegård www.mwg.no	Data, mål, design og bilder som vises over er beregnet for informasjon og kan endres uten forvarsel. Sist oppdatert 09/05-2018.
---	---	---