


## MODULAR ACCESSORIES

### Isolating switches - On-off switches with indicator lamp


TECHNICAL DATA					
		Isolating switches		On-off switches with indicator lamp	
<b>Standards:</b>		EN 60669-2-4		EN 60669-1	
<b>Rated operating voltage (Ue):</b>	(V)	250 - 415 a.c.		230 a.c.	
<b>Rated insulation voltage (Ui):</b>	(V)	500 a.c.			
<b>Rated frequency:</b>	(Hz)	50/60			
<b>Rated operating current (Ie):</b>	(A)	16	32	16	32
<b>Power loss per pole:</b>	(W)	0.35	1.4	0.35*	1.4*
<b>Indicator lamp supply voltage:</b>	(V)	-		230 a.c.	230 a.c.
<b>Lamp consumption:</b>	(W)	-		0.8	0.8
<b>Lamp duration:</b>	(h)	-		100.000	100.000
<b>Closing capacity:</b>		1.25 Ie - 1.1 Ue - cosφ = 0.6			
<b>Rated conditional short-circuit current (Inc):</b>	(A)	1500			
<b>Coordination with fuses gG:</b>	(A)	16	32	16	32
<b>Operating temperature:</b>	(°C)	5...40			
<b>Maximum cable section:</b>	(mm <sup>2</sup> )	6 (flexible) 10 (rigid)			
<b>Lockable:</b>		with GW 96 041 (padlocking lever block)			

\* The value does not include the power of the indicator lamp

### Circuit diagrams - Isolating switches

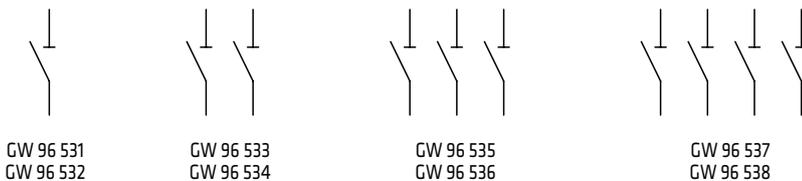

### Circuit diagrams - On-off switch with indicator lamp

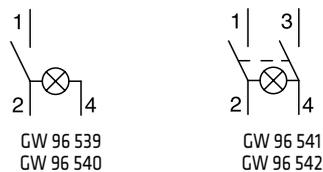


## MODULAR ACCESSORIES


### Lever switches

TECHNICAL DATA			
<b>Standards:</b>		EN 60669-1	
<b>Rated operating voltage (U<sub>e</sub>):</b>	<b>(V)</b>	250 a.c.	
<b>Rated frequency:</b>	<b>(Hz)</b>	50/60	
<b>Rated operating current (I<sub>e</sub>):</b>	<b>(A)</b>	16	32
<b>Device power loss:</b>	<b>(W)</b>		
<b>GW 96 551</b>		0.4	-
<b>GW 96 552</b>		0.8	-
<b>GW 96 553</b>		0.4	-
<b>GW 96 554</b>		0.8	-
<b>GW 96 555 - GW 96 556</b>		0.4	2.8
<b>Operating temperature:</b>	<b>(°C)</b>	5...40	
<b>Maximum cable section:</b>	<b>(mm<sup>2</sup>)</b>	6 (flexible) 10 (rigid)	
<b>Lockable:</b>		with GW 96 041 (padlocking lever block)	


### Circuit diagrams




GW 96 553




GW 96 554



GW 96 551



GW 96 552



GW 96 555  
GW 96 556

