




Typical connection

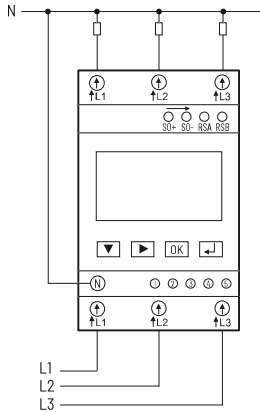

Manuals and documents in further languages:
https://eltako.com/redirect/DSZ16DE-3*100A

Technical data page 10-34.

DSZ16DE-3x100A



Three-phase meter 3x100 A with Modbus and S0 interfaces. Can be combined with various Modbus gateways, such as the ZGW16WL-IP, for evaluation and forwarding of data via various protocols. Standby loss 0.8 W per path only.

Modular device for DIN-EN 60715 TH35 rail mounting.

3 modules (54 mm wide), 58 mm deep. Terminals cover is sealable. Accuracy class B (1%).

The inrush current is 40 mA per path.

Measurement functions and measured values:

- Voltage, current, active power, apparent power, reactive power, power factor, frequency
- 4 tariff meter and total meter for active power
- Connection of 1, 2, or 3 external conductors possible
- Measurement value update every 100 ms
- Maximum current 100 A/Reference current 10 A

Display and operation:

- Meter reading
- Voltages: L1-N, L2-N, L3-N, L1-L2, L2-L3, L3-L1
- Currents: L1, L2, L3, N
- Active power per phase and total
- Frequency
- Total consumption and per phase
- Display of the current tariff (T1-T4)
- Resettable meter readings for total and tariff values
- Display also during power failure (twice within 14 days)
- LED display (100 pulses/kWh)
- PIN protection for settings
- Reset to factory settings possible (PIN, S0, Modbus)

Communication:

- Modbus RTU (RS485):
 - Address 1-247 (Default: 1)
 - Baud rate: 300-115200 (Default: 9600)
 - Parity: None, Odd, Even (Default: None)
 - Stop bits: 1, 2 (Default: 1)
- Modbus register table available on the product page

S0 output:

- Pulse rate: 0,01 to 10.000 pulses/kWh (Default: 1.000 pulses/kWh)
- Pulse width: 2-99 ms (Default: 30 ms)

Varenummer 104302